
## SYNERGY HORN FULL RANGE LOUDSPEAKERS

The J4 is the latest member of the "Jericho Horn" product line. Utilizing 64 compression drivers firing into a Synergy Horn, the J4 brings the ability to produce extreme directivity with high output and fidelity to extreme distances. The J4 is in a league of its own.

# **Specifications**

Coverage Pattern	30° horizontal x 10° vertical
Operating Frequency Range	1kHz-18kHz+/- 3 dB
Maximum Output	150dBCont., 153dB Program
Recommended Amplifier Power:	
4- 1,500 watts per channels	
Recommended Processing	DSL exclusive processor
Drivers	HF 64 x 1"
Input Connections	NL4 passive-NL8 Active
Enclosure Material	. 18mm Baltic Birch, polyurea coated

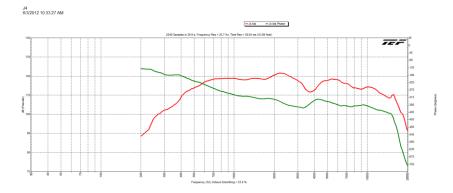

J4
Extreme
intelligibility and
fidelity at
extreme
distances



### **Accessories**

J4-OFW Outer Fly-ware Cabinet dolly, Touring Cover Weatherized options

PERFORMANCE DATA										
	Model	Max SPL	Sensitivity	Magnitude Response	Beam Width	Power Rating	Dimensions (in.)	Weight		
	J4	153dB	120dB	3kHz-18kHz	30° x 10°	6,000	60.5"H x 22.5"W x 41"D	487 lbs		

#### SYNERGY HORN FULL RANGE LOUDSPEAKERS

### **Architect/Engineers Specs**

The loudspeaker shall utilize the Synergy Horn patent-pending enclosure utilizing 64 1" compression drivers. The coverage pattern shall be 30° horizontal x 10° vertical. The loudspeaker shall have an operating range of 1kHz-18kHz +/- 3 dB. 153dB 1m. Output. Power handling shall be 8,000Watts continuous program.

The loudspeaker shall be constructed of 18mm Baltic birch, water resistant Polyurea coated, properly braced for the intended use and a rugged steel grill. The Loudspeaker shall be the Danley Sound Labs J4.