

SPECIFICATIONS

KEY FEATURES:



- ▶ Small Subwoofer Enclosure
- ▶ U-bracket included



APPLICATIONS:

- ▶ Houses of Worship
- ▶ Performing Arts Centers
- ▶ Sports Facilities
- ▶ Theme Parks
- ▶ Clubs / Restaurants
- ▶ Cruise Ships / Yachts
- ▶ Schools

Operating Frequency Range -----49 Hz - 3 dB --- 35Hz -10 dB
 Sensitivity -----89 dBSPL measured in half space at 1M @ 2.83V input
 Maximum Output ----- 110 dBSPL Cont., 116 dBSPL Peak
 Recommended Amplifier Power ----- 150 Watts Cont., 600 Watts Peak
 Drivers ----- 1 x 8" heavy duty long excursion driver in a tuned ported enclosure
 Input Connections ----- NL4
 Impedance ----- 8 ohm Nominal

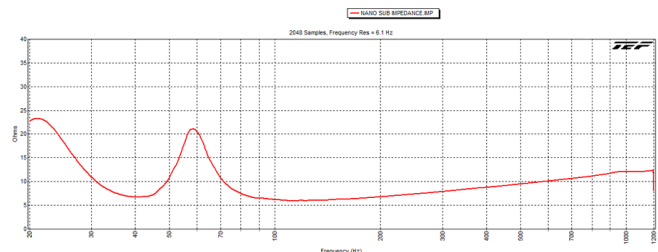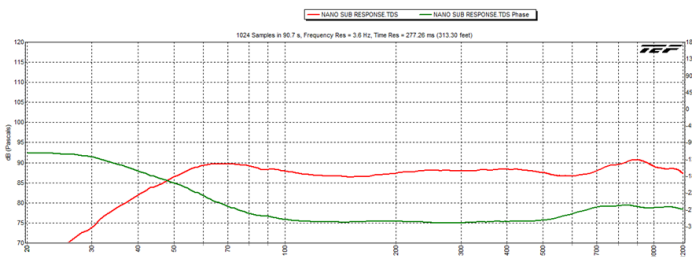

Performance Data

Model	MAX SPL	Sensitivity	Magnitude Response	Beam Width	Power Rating	Dimensions	Weight
Nano Sub	116 dB	89 dB	35 Hz - 1400 Hz	Omnidirectional	300W	12.75"H x 22"W x 9"D	26 lbs